### **DATA SHEET**

## Accessories

# **ProTec ZPN Cable Set**

## **Product Variants with Integrated Fuse**



Location of Use: Power supply for application space

(RfZ)-gateway and the termination point for meter space (APZ)-modem

Cable Set: Two BLF 5.08 Plugs


Two pairs of Connection Cables

#### **Technical Data**

#### ProTec ZPN Cable Set

IEC Electrical		
Rated Current		9.5 A
Isolation Voltage		6kV
Short Circuit Current		25kA
Mechanical & Environmental		
Operating Temperature Range	$T_{a}$	-40 °F to +185 °F [-40 °C to +85 °C]
Type of Connection		Plug BLF 5.08
Cable Length	a - Modem Connection Cable	80 cm
	b - Gateway Connection Cable	115 cm
Cable Cross Section		0.82 mm <sup>2</sup> (Stranded)
Order Information		
Order Code		
ProTec ZPN Cable Set		515 793

## **Product Diagram**

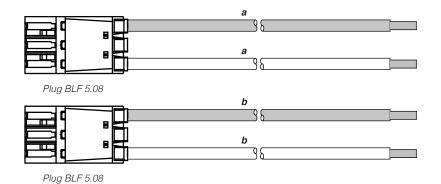

- a Modem Connection, 80 cm
  - **b** Gateway Connection, 115 cm



